

ELIV.PCD


Phase cut dimmer WIFI

Monochannel Dimmers with Output phase cut.
Input Range: 80-230V AC 50Hz.
Controllable with Android/iOS/Windows app ELIV.

| Input Controls | |
|------------------------------|----------|
| Type | Q.ty |
| Insulated Push button | 1 |
| Wifi | 1 |

Technical notes

- ✓ Monochannel Dimmers with Output phase cut.
- ✓ **Input Range: 80-230V AC 50Hz.**
- ✓ Max resistive load 1A.
*For Electronic and/or LED Electronic loads consider the maximum half power compared to the nominal value Example: 220V AC 110W Max. Do not connect inductive loads Do not connect UPS with output different from Pure Sine Wave.
- ✓ **The device is not equipped with earth connection protection against accidental contact with live parts is guaranteed by the enclosure.**
- ✓ Cross-section of conductors 14-22 AWG (0.205-2.08 mmq).
- ✓ **Controllable with Android/iOS/Windows app ELIV.**
- ✓ Input Controls: Insulated Push button x1, Wifi x1.
- ✓ **Printed Circuit UL.**
- ✓ Protection Class: IP20.
- ✓ **Standard Dimension 40x80x24.45 mm.**
- ✓ Dimension with accessories 40x100x24.45 mm.
- ✓ **Works with the Google Assistant.**
- ✓ Compatible with Amazon Alexa Voice Assistant through the skill ELIV.
- ✓ **Surge voltage protection.**
- ✓ Over current protection.
- ✓ **Use only in dry conditions.**

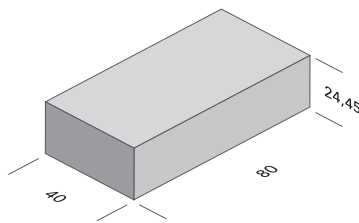

| Code | Input voltage | (MAX) Output current | N. Output channels | MAX Output power | Control inputs | Case | Dimension mm |
|-----------------|-------------------|----------------------|--------------------|------------------------|---|------------|--------------------------|
| ELIV.PCD | 80-230V AC | From 0A to 1A | 1 | 230W @ 230V AC* | Insulated push button x1 Wifi x1 | YES | 40x80 h 24.45 |



WIFI

