## ELIV.R1D


## SSR relay controllable via wifi and voice assistant

SSR relay output device controllable via Wifi and/or push button N.O. Controllable with Android/iOS app ELIV.

Input Controls				
Туре	Q.ty			
Not insulated Push button	1			
Wifi	1			

## **Technical notes**

- ✓ SSR relay output device controllable via Wifi and/or push button N.O.
- ✓ Power input voltage range 100-240 VAC.
- ✓ Max Output current 2A RMS.
- The device is not equipped with earth connection protection against accidental contact with live parts is garantied by the enclosure.
- Cross-section of cables 14-30 AWG (0.05-2.08 mmq).
- Controllable with Android/iOS/Windows app ELIV.
- Input Controls: Not insulated Push button x1, Wifi x1.
- Printed Circuit UL.
- ✓ Protection Class: IP20.
- Standard Dimension 40x80x24.45 mm.
- ✓ Dimension with accessories 40x100x24.45 mm.
- ✓ Works with the Google Assistant.
- Compatible with Amazon Alexa Voice Assistant through the skill ELIV.
- ✓ All connections must be made with non-live devices and carried out by specialized personnel.
- Use only in dry conditions.

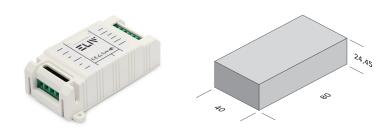

C	Code	Input voltage	(MAX) Output current	Control inputs	Case	Dimension mm
ELI	V.R1D	100-240V AC	2A RMS	Not insulated push button x1 Wifi x1	YES	40x80 h 24.45
CE	RoHS		WIFI Scogle As	nthe Isistant 🔵 amazon alexa		



ELIV is a registered trademark of RETE DI IMPRESE LUCE IN VENETO Via dei Marcello n°13/11, 35017 Levada di Piombino Dese (PD) Italy P.IVA/VAT: IT04960540286 Tel/Fax: +39 049 9350457 Email: info@luceinveneto.com PEC: luceinveneto@legalmail.it