

ELIV.R2D


SSR relay controllable via wifi and voice assistant

Dual SSR relays output device controllable via Wifi and/or push button N.O.
Controllable with Android/iOS app ELIV.

Input Controls	
Type	Q.ty
Not insulated Push button	2
Wifi	1

Technical notes

- ✓ Dual SSR relay output device controllable via Wifi and/or push button N.O.
- ✓ **Power input voltage range 100-240 VAC.**
- ✓ Max Output current 2A RMS.
- ✓ **The device is not equipped with earth connection protection against accidental contact with live parts is guaranteed by the enclosure.**
- ✓ Cross-section of cables 14-30 AWG (0.05-2.08 mm²).
- ✓ **Controllable with Android/iOS/Windows app ELIV.**
- ✓ Input Controls: Not insulated Push button x2, Wifi x1.
- ✓ **Printed Circuit UL.**
- ✓ Protection Class: IP20.
- ✓ **Standard Dimension 40x80x24.45 mm.**
- ✓ Dimension with accessories 40x100x24.45 mm.
- ✓ **Works with the Google Assistant.**
- ✓ Compatible with Amazon Alexa Voice Assistant through the skill ELIV.
- ✓ **All connections must be made with non-live devices and carried out by specialized personnel.**
- ✓ Use only in dry conditions.

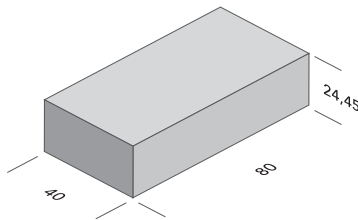

Code	Input voltage	(MAX) Output current	Control inputs	Case	Dimension mm
ELIV.R2D	110-240V AC	2A RMS (for channel)	Not insulated push button x2 Wifi x1	YES	40x80 h 24.45

